

Description

ISO Tank Containers have always been the safest and most environmentally friendly to move your products across the globe. Designed for maximum capacity, our 24000L T11/ T14 units will suit your every need.

Features

Full Frame, insulated, full walkway	TP 6 Bar
WP 4 Bar	Available in top and bottom dis- charge
SRV Provision 3" weld-in flange	Air Line: 1.5" BSP, dust cap connect outled with SS chain
Manlid: SS, open to 135degrees, 8 point wing nuts , 500mm diameter	Bottom discharge : 3" (DN80) flanged, footvalve and 3" clamped
SRV 2,5" BSP, Stainless steel, 4.4 bar pressure safety relief valve, without flame proof gauze	butterfly valve

General: IMDG/ADR/RID/US DOT(CFR49)-UN Portable tank T11, RID/ADR-L4BN, UIC, TIR, TC



Specifications

Dimensions

Height: 8'6" / 2,59m Width: 8' / 2,43m Length: 20' / 6,09m

Capacity 24.000 L

Tare Weight 3,530 KG approx.

Max Gross Weight 36,000 KG approx.

Max payload 34,520 KG approx.

Get in touch

+32 475 28 20 77





Mimu-tankleasing.com



Luithagen 18 2030 Antwerp - Belgium

Mechanical


Get in touch


+32 475 28 20 77

Mimu-tankleasing.com

Luithagen-haven 18 2030 Antwerpen



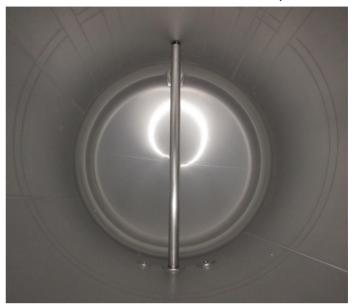









Mechanical

Get in touch


- +32 475 28 20 77
- Mimu-tankleasing.com
- ☑ Info@mimu.be
- Luithagen-haven 182030 Antwerpen









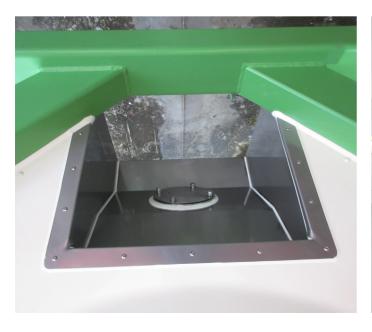



Mechanical

Get in touch

+32 475 28 20 77

☑ Info@mimu.be

Luithagen-haven 182030 Antwerpen







